
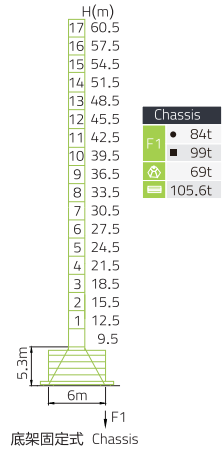



T6513-8

塔身 Masts / 反力 Reactions / T6513-8E



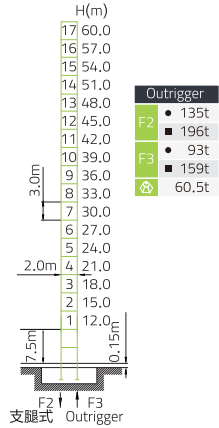


- 工作状态反力
Reactions in service
- 非工作状态反力
Reactions out of service
- ⊗ 独立高度、最大起重臂的自重 (不含平衡重、吊重)
Weight with max free-standing height, max jib (without counter-weight and load)
- 独立高度、最大起重臂长时的压重重
Ballast weight with max free-standing height


附着 Anchorages / T6513-8E

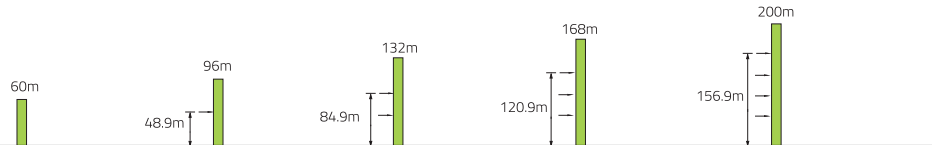

塔身 Masts / 反力 Reactions / T6513-8F

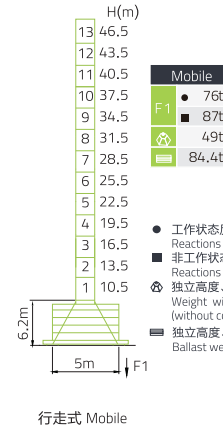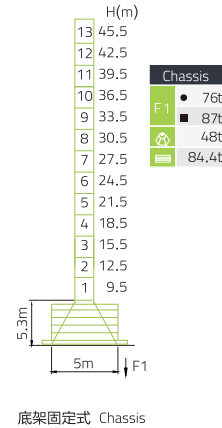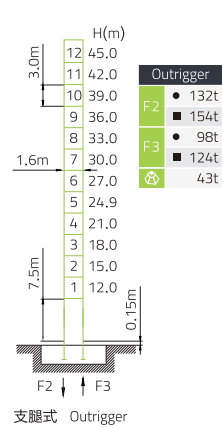



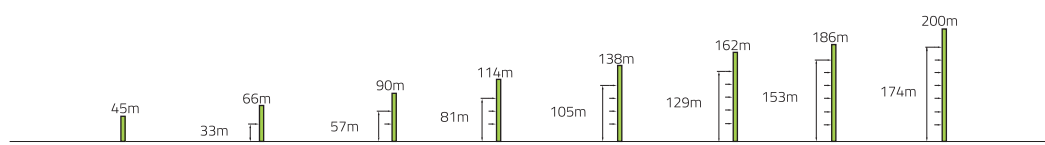














附着 Anchorages / T6513-8F







100t/m

T6513-8

起重特性 Load Diagrams

		Max. Capacity m/t	2.5~15	20	25	30	35	40	45	50	55	60	65
65m (R=66.3m)		2.5~28.88/4.00	4.00			3.82	3.14	2.64	2.25	1.94	1.69	1.48	1.30
		2.5~15.93/8.00	8.00	6.13	4.69	3.74	3.07	2.57	2.18	1.87	1.61	1.40	1.23
60m (R=61.3m)		2.5~31.00/4.00	4.00			3.44	2.90	2.48	2.15	1.88	1.65		
		2.5~17.08/8.00	8.00	6.66	5.11	4.09	3.37	2.83	2.41	2.07	1.80	1.58	
55m (R=56.3m)		2.5~32.40/4.00	4.00			3.64	3.07	2.63	2.28	2.00			
		2.5~17.84/8.00	8.00	7.01	5.39	4.32	3.56	3.00	2.56	2.21	1.93		
50m (R=51.3m)		2.5~32.56/4.00	4.00			3.66	3.09	2.65	2.30				
		2.5~17.93/8.00	8.00	7.05	5.42	4.35	3.58	3.02	2.58	2.23			
45m (R=46.3m)		2.5~32.55/4.00	4.00			3.66	3.09	2.65					
		2.5~17.92/8.00	8.00	7.05	5.42	4.34	3.58	3.02	2.58				
40m (R=41.3m)		2.5~32.23/4.00	4.00			3.61	3.05						
		2.5~17.75/8.00	8.00	6.97	5.35	4.29	3.54	2.98					
35m (R=36.3m)		2.5~31.43/4.00	4.00			3.50							
		2.5~17.31/8.00	8.00	6.77	5.20	4.16	3.43						
30m (R=31.3m)		2.5~30.00/4.00	4.00										
		2.5~17.11/8.00	8.00	6.63	5.11	4.10							

传动机构 Mechanisms

配置 Configuration			H		HH		kW	
			IV	V	IV	V		
	H30FP20-400	m/min	40	80	20	40	30	400m(6 layers)
		t	4	2	8	4		
	QP8100D2	m/min	50	100	25	50	37	610m(5 layers)
		t	4	2	8	4		
	HPW75.130A	r/min	0-0.7				2x7.5	① 超出咨询我们 Consultus if overtop
	BP40B	m/min	0-55				4.0	
	ZA52-D/ B52-D	m/min	0-25				2x5.2	
	380V(±10%)50Hz	49.0+2x5.2kW(不包括液压系统 Excluding Erecting Mechanism) 56.0+2x5.2kW(不包括液压系统 Excluding Erecting Mechanism)						

100m